

HERMES BLACK


wall-mounted air conditioning



lezZucche 05/21



WWW.SENDOITALIA.COM

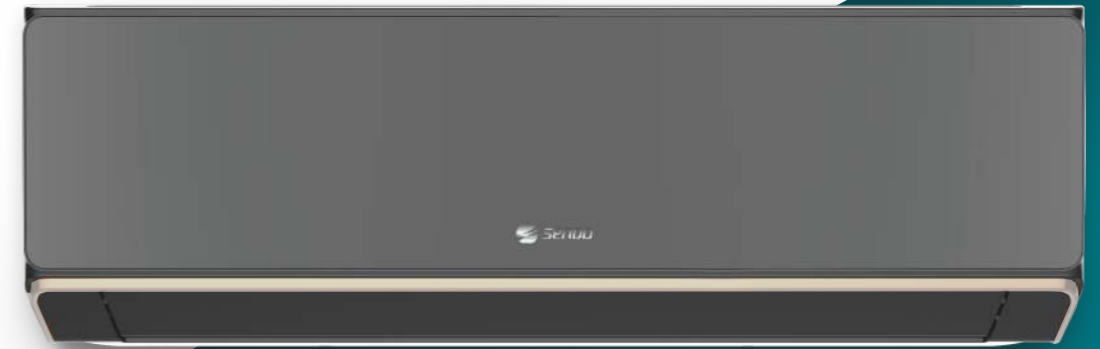

TECHNICAL DATA		Internal unit Outdoor unit	SND-09HRSB-ID SND-09HRSB-OD	SND-12HRSB-ID SND-12HRSB-OD
Power Supply Source			220 ~ 240V 1-50Hz	220 ~ 240V 1-50Hz
Rated Capacity	Cooling		2600 (980-2900) W	3550 (1100-3700) W
	Heating		2700 (680-3000) W	3550 (1100-3800) W
Electrical absorption	Rated Running Current Cooling		3.6 (1.3-4.5) A	4.8 (1.5-5.4) A
	Rated Running Current Heating		3.4 (0.9-4.0) A	4.3 (1.3-5.0) A
	Rated Power Consumption Cooling		800 (300-900) W	1090 (340-1150) W
	Rated Power Consumption Heating		750 (190-830) W	970 (300-1060) W
	Max. Input Current		8A	9.5A
	Max. Input Power		1600 W	1900 W
Energy performance	SEER Cooling		6.1	6.1
	Energy efficiency class		A++	A++
	SCOP Heating (Central Europe)		4.0	4.0
	Energy efficiency class		A+	A+
Refrigerant circuit	Max. Discharge Pressure		4.28 MPa	4.28 MPa
	Max. Suction Pressure		1.15 MPa	1.15 MPa
	Refrigerant		R32	R32
	Refrigerant Charged		580 g	680 g
Air Flow Volume		650 m ³ /h	650 m ³ /h	
Sound Pressure Level	Indoor Unit (Hi. / Med. / Lo.)		48/42/30 dB(A)	52/40/30 dB(A)
	Outdoor Unit		48 dB(A)	55 dB(A)
Sound Power	Indoor Unit (Hi. / Med. / Lo.)		38/33/20 dB(A)	42/33/22 dB(A)
	Outdoor Unit		57 dB(A)	46 dB(A)
Net weight	Indoor Unit		8 Kg	8.5 Kg
	Outdoor Unit		26 Kg	26 Kg
Piping	Liquid mm (inch)		6.35 (1/4")	6.35 (1/4")
	Gas mm (inch)		9.53 (3/8")	9.53 (3/8")
	Maximum pipe length (m)		10	10
	Maximum pipe height		7	7
	Additional charge (g/m)		20	25
	Preload length (m)		3	3
Dimension	Indoor Unit (mm)		792x201x292	792x201x292
	Outdoor Unit (mm)		730x285x545	730x285x545

Note: SENDO reserves the right to change the technical data in the table without prior notice.

HERMES BLACK

NOTHING ELSE MATTERS BUT SUPREMACY



R32



INVERTER



Wi-Fi



EXTRA FILTERS



GOLDEN FIN

HERMES BLACK series



R32



INVERTER



Wi-Fi



EXTRA FILTERS



GOLDEN FIN



Low operating voltage range 130V - 270V



4D air flow

Balanced airflow with range up to 18m and more precise temperature regulation.



Soundless design

A large compressor in conjunction with the best heat exchange system ensures better cooling performance.

BASIC MODES



Auto defrost



Self-diagnosis of faults



Sleep mode



Turbo mode



Auto restart



Timer



Antibacterial function



iClean



4D Air flow



iFeel

NOTHING ELSE
MATTERS BUT
SUPREMACY

